

# Clean Room Instrumentation for EMS

*When Close Monitoring Matters...*

**...Trust GLOBAL**

**CLEAN ROOM MONITORS**

**DIFFERENTIAL PRESSURE INDICATORS**

*Swiss Made:* **RH+TEMPERATURE SENSORS**

**GLOBAL ELECTRONICS, HYDERABAD, INDIA**

*AN ISO 9001:2008 COMPANY*



Since 1977

...Leadership Through Research

## DIFFERENTIAL PRESSURE INDICATOR - Model: DPI 102


Global's new DPI 102 is specifically designed for continuous monitoring of **Differential Pressure**. It is built in a compact shallow enclosure to allow installation in 40 mm thick **Prefab Clean Room Panels**.

### FEATURES

- Microprocessor based design with advanced fault tolerant design
- **One Touch single point calibration**
- Advanced Self calibration algorithm
- 3 digit High Brightness LED display with Annunciation LEDs
- Software programmable units of measurement
- **Record of Minimum & Maximum DP**
- RS 485 multi dropping communication for Host Controller / SCADA system.
- Digital Data transmission for zero error data recording\*
- ABS enclosure with Stainless Steel cover
- Monitoring and Tamperproof logging of the Data on SCADA with 21CFR Part 11 compliance.\*

### Applications:

- Clean Room monitoring
- AHU Mounted Monitoring
- HVAC Filter Monitoring / Status Alarm.
- Fan Pressure Indication, Fan Failure Interlock.
- Duct Static Pressures monitoring & Alarm.
- Bi-direction ranges ideal for sensing fluctuating building pressure.
- Airflow measurement in ducts (Option)

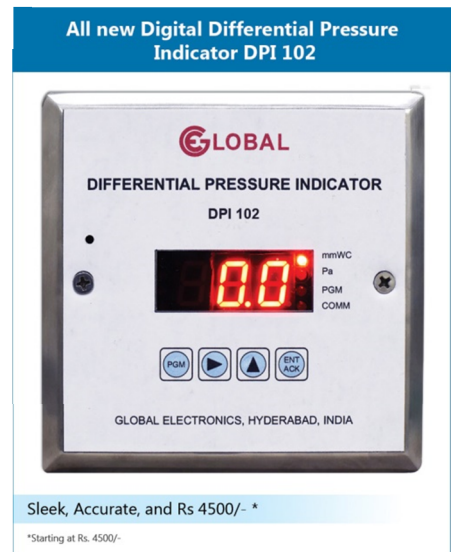

Sleek, Accurate, and Rs 4500/- \*

\*Starting at Rs. 4500/-



Since 1977

...Leadership Through Research

### Indicator Specifications:

### SPECIFICATION

Display	:	3 digit High Brightness Red LED with Annunciators for units, set point and alarm status.
Display Units	:	User programmable: mm w.c. & Pa.
Input Media	:	Air and non-combustible and non corrosive gases. Wetted Materials: Consult factory.
Range	:	-10 to +50 mm w.c.
Accuracy	:	$\pm 1\% \pm 1$ Digit;
Pressure Limits	:	Ranges : For Sensors $\leq 4$ " w.c.: 2.5 psi
Compensated Temp. Range	:	0 to 60°C
Zero & Span Adjustments	:	Digital push-button zero and span
Calibration	:	Software calibration for each channel
Calibration data	:	Stored in Non Volatile memory with calibration record

### Control Specifications:

Alarms	:	Programmable with settable delay, Period of Activation, and LED annunciation *
Relay Type	:	SPDT Relay; 1 Amp @ 30 VAC / VDC *

### Output Specifications:

Communication	:	RS 485 Modbus Protocol * Baudrate : User Selectable: 9.6K, 19.2K & 38.4K bps
Output Signal	:	4-20 mA DC into 600 ohms max *

### Power & Environment:

Power Requirements	:	18-28 VDC
Power Consumption	:	3 VA max.
Temperature Operation	:	0 to 60°C
Rel. Humidity	:	0 to 80% ( Non Condensing )

### Mechanical & Mounting:

Housing Material	:	ABS case
Mounting Orientation	:	Mount unit in vertical plane.
Size	:	114mm Dia X 39mm depth, Faceplate:122mmX122mm
Panel Cut-out	:	114mm dia
Weight: Approx.	:	1 Kg
Electrical Connections	:	Screw Terminals

DATA & SPECIFICATION SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

**\*Option: to be ordered separately**

**GLOBAL ELECTRONICS**

**AN ISO 9001:2008 COMPANY**

**3-5-331, NARAYANGUDA, HYDERABAD-500029. INDIA**

PH: +91 402322 1391, 23226687 FAX: +91 402322 2484 email:[Info@ge-india.com](mailto:Info@ge-india.com) URL: <http://www.ge-india.com>